




3 Leg Bridle Slings

HH-303-TTS

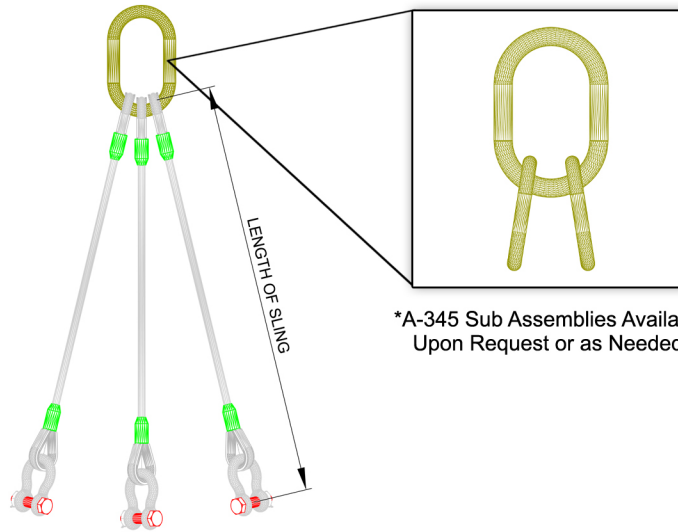

*A-345 Sub Assemblies Available Upon Request or as Needed.

Wire Rope Diameter (inches)	EIPS Capacities In Tons Angle With Horizontal			Crosby A-342 Alloy Oblong Master Link*			Crosby G-2130 Shackle	Minimum Sling Length
	60 Deg	45 Deg	30 Deg	Dia. (inches)	W"x L" (inches)		Nominal Size (inches)	
1/4"	1.69	1.38	0.98	1/2"	2.5"	5"	3/8"	1'-3"
3/8"	3.6	3.0	2.1	3/4"	2.75"	5.5"	1/2"	1'-8"
1/2"	6.5	5.3	3.8	1"	3.5"	7"	5/8"	2'
5/8"	10.1	8.3	5.9	1"	3.5"	7"	3/4"	2'-4"
3/4"	14.5	11.9	8.4	1-1/4"	4.38"	8.75"	7/8"	2'-9"
7/8"	19.7	16.1	11.4	1-1/4"	5.25"	10.5"	1"	3'-3"
1"	25.5	20.8	14.7	1-3/4"	6"	12"	1-1/8"	3'-6"
1-1/8"	31	25	18.0	2"	7"	14"	1-1/4"	4'
1-1/4"	39	32	23.0	2-1/4"	8"	16"	1-3/8"	4'-6"
1-3/8"	47	38	27.0	2-1/4"	8"	16"	1-1/2"	5'
1-1/2"	55	45	32.0	2-3/4"	9.5"	16"	1-1/3"	5'-6"
1-3/4"	73	59	42.0	2-3/4"	9.5"	16"	2"	6'-6"
2"	96	78	56.0	3-1/4"	10"	20"	2-1/2"	8'
2-1/4"	114	93	66.0	4"	10"	20"	2-1/2"	8'-9"

*ALL MASTER LINKS ARE SIZED TO ACCOMODATE HEAVY DUTY THIMBLES. IF THIMBLES ARE NOT REQUIRED, A SMALLER MASTER LINK COULD BE APPROPRIATE.
ALL SLINGS ARE PROOF TESTED TO 2 TIMES WORKING LOAD LIMIT. DESIGN FACTOR IS 5:1