




4 Leg Bridle Slings

HH-404-TTS

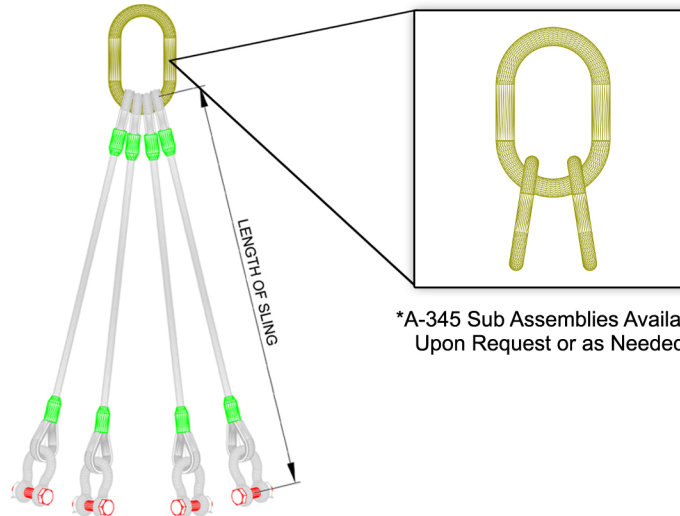

*A-345 Sub Assemblies Available Upon Request or as Needed.

Wire Rope Diameter (inches)	EIPS Capacities In Tons Angle With Horizontal			Crosby A-342 Alloy Oblong Master Link*			Crosby G-2130 Shackles Nominal Size (inches)	Minimum Sling Length
	60 Deg	45 Deg	30 Deg	Dia. (inches)	W"x L" (inches)			
1/4"	2.25	1.84	1.3	5/8"	3"	6"	3/8"	1'-3"
3/8"	4.8	4	2.8	1"	3.5"	7"	1/2"	1'-8"
1/2"	8.7	7.1	5.0	1-1/4"	4.38"	8.75"	5/8"	2'
5/8"	13.5	11	7.8	1-1/2"	5.25"	10.5"	3/4"	2'-4"
3/4"	19.4	15.8	11.2	1-1/2"	5.25"	10.5"	7/8"	2'-9"
7/8"	26.3	21.5	15.2	1-3/4"	6"	12"	1"	3'-3"
1"	33.9	27.7	19.6	2"	7"	14"	1-1/8"	3'-6"
1-1/8"	41.5	33.9	24.0	2-3/4"	9.5"	16"	1-1/4"	4'
1-1/4"	52	42	30.0	2-3/4"	9.5"	16"	1-3/8"	4'-6"
1-3/8"	62	51	36.0	3-1/2"	12"	24"	1-1/2"	5'
1-1/2"	73	59	42.0	3-1/2"	12"	24"	1-1/3"	5'-6"
1-3/4"	97	79	56.0	3 **	9"	18"	2"	6'-6"
2"	128	105	74.0	3-3/4"	10"	20"	2-1/2"	8'
2-1/4"	152	124	88.0	4"	10"	20"	2-1/2"	8'-9"

*ALL MASTER LINKS ARE SIZED TO ACCOMODATE HEAVY DUTY THIMBLES. IF THIMBLES ARE NOT REQUIRED, A SMALLER MASTER LINK COULD BE APPROPRIATE. **ALL SLINGS ARE PROOF TESTED TO 2 TIMES WORKING LOAD LIMIT. DESIGN FACTOR IS 5:1**