



# 4-Leg Bridle

## HH-404-TTS-342



WIRES ROPE SLINGS

PRODUCTS

Wire Rope Diameter (inches)	EIPS Capacities In Tons Angle With Horizontal			Recommended Master Link			Recomm. Shackle Size (Inches)	Recomm. Eye Hooks	Minimum Sling Length
	60 Deg	45 Deg	30 Deg	Dia. (inches)	Width (inches)	Length (inches)			
1/4"	2.2	1.8	1.3	1/2"	2	3	3/8"	3/4 ton	1'-3"
3/8"	5	4.1	2.9	3/4"	3	4.5	1/2"	1.5 ton	1'-8"
1/2"	8.8	7.1	5.1	1"	4	6	5/8"	3 ton	2'
5/8"	14	11	7.8	1 1/4"	5	7.75	3/4"	5 ton	2'-4"
3/4"	19	16	11	1 1/2"	6	9	7/8"	7 ton	2'-9"
7/8"	26	21	15	1 3/4"	7	10.5	1"	7.5 ton	3'-3"
1"	34	28	20	1 7/8"	7.5	11.25	1 1/8"	10 ton	3'-6"
1-1/8"	42	34	24	2 1/4"	9	13.5	1 1/4"	15 ton	4'
1-1/4"	51	42	30	2 1/2"	10	15	1 3/8"	15 ton	4'-6"
1-3/8"	62	50	36	2 3/4"	11	16	1 1/2"	20 ton	5'
1-1/2"	73	60	42	2 3/4"	11	16	1 3/4"	22 ton	5'-6"
1-3/4"	98	80	57	4"	13	19.5	2 1/2"	30 ton	6'-6"
2"	127	104	73	4"	16	24	2 1/2"	37 ton	8'
2-1/4"	154	126	89	N/A	N/A	N/A	2 1/2"	-	8'-9"

All master links are sized to accommodate heavy-duty thimbles.  
If thimbles are not required, a smaller master link may be appropriate.


\*\*If thimble is required at the top, these sizes must use an A-345 Master Link Assembly.

All slings are proof-tested to 2 times working load limit. Design factor is 5:1.

# 4-Leg Bridle Sub Assembly



## HH-404-TTS-345

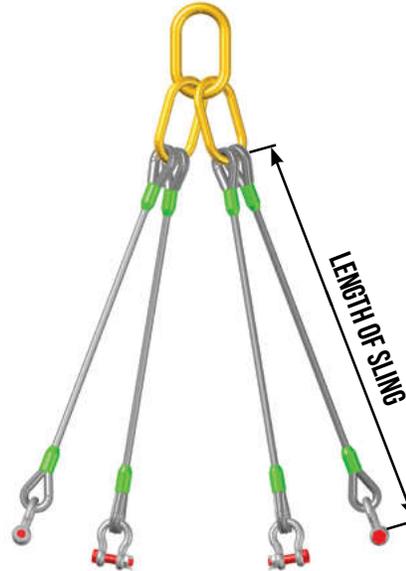


Wire Rope Diameter (inches)	EIPS Capacities In Tons Angle With Horizontal			Recommended Master Link Assembly				Recomm. Shackle Size (inches)	Recomm. Eye Hooks	Minimum Sling Length
	60 Deg	45 Deg	30 Deg	Dia. (inches)	Width (inches)	Length (inches)	Inside Dia. (inches)			
1/4"	2.2	1.8	1.3	N/A	N/A	N/A	N/A	3/8"	3/4 ton	1'-3"
3/8"	5	4.1	2.9	3/4"	3.2	6	1.77	1/2"	1.5 ton	1'-8"
1/2"	8.8	7.1	5.1	1"	4.3	7.5	2.36	5/8"	3 ton	2'
5/8"	14	11	7.8	1 1/4"	5.5	9.5	3.54	3/4"	5 ton	2'-4"
3/4"	19	16	11	1 1/2"	5.9	10.5	3.94	7/8"	7 ton	2'-9"
7/8"	26	21	15	1 3/4"	6	12	5	1"	7.5 ton	3'-3"
1"	34	28	20	1 7/8"	6	12	5	1 1/8"	10 ton	3'-6"
1 1/8"	42	34	24	2 1/4"	7	14	5.75	1 1/4"	15 ton	4'
1 1/4"	51	42	30	2 1/2"	8.38	16	8.38	1 3/8"	15 ton	4'-6"
1 3/8"	62	50	36	2 3/4"	8.38	16	8.38	1 1/2"	20 ton	5'
1 1/2"	73	60	42	2 3/4"	9.88	18	9.88	1 3/4"	22 ton	5'-6"
1 3/4"	98	80	57	4"	12	24	12	2 1/2"	30 ton	6'-6"
2"	127	104	73	4"	12	24	12	2 1/2"	37 ton	8'
2 1/4"	154	126	89	4"	12	24	12	2 1/2"	-	8'-9"



# 4-Leg Bridle Pear Link

## HH-404-TTS-341

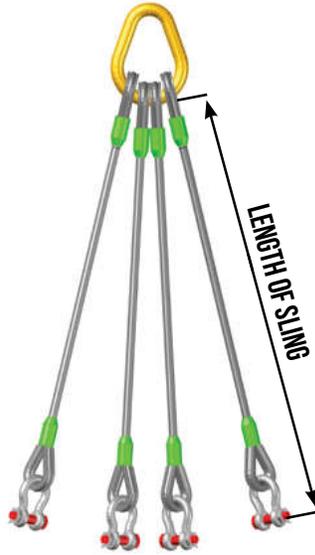

WIRES ROPE SLINGS

PRODUCTS

Wire Rope Diameter (inches)	EIPS Capacities In Tons Angle With Horizontal			Recommended Pear-Shaped Link				Recomm. Shackle Size (Inches)	Recomm. Eye Hooks	Minimum Sling Length
	60 Deg	45 Deg	30 Deg	Dia. (inches)	Cap. (Tons)	Width (inches)	Length (inches)			
1/4"	2.2	1.8	1.3	1/2"	3.15	2	3	3/8"	3/4 ton	1'-3"
3/8"	5	4.1	2.9	3/4"	5.59	3	4.5	1/2"	1.5 ton	1'-8"
1/2"	8.8	7.1	5.1	1"	11	4	6	5/8"	3 ton	2'
5/8"	14	11	7.8	1 1/4"	16.4	5	7.75	3/4"	5 ton	2'-4"
3/4"	19	16	11	1 1/2"	24.7	6	9	7/8"	7 ton	2'-9"
7/8"	26	21	15	1 3/4"	38.6	7	10.5	1"	7.5 ton	3'-3"
1"	34	28	20	1 7/8"	43.5	7.5	11.25	1 1/8"	10 ton	3'-6"
1-1/8"	42	34	24	2 1/4"	65	9	13.5	1 1/4"	15 ton	4'
1-1/4"	51	42	30	2 1/2"	66.9	10	15	1 3/8"	15 ton	4'-6"
1-3/8"	62	50	36	2 3/4"	98.6	11	16	1 1/2"	20 ton	5'
1-1/2"	73	60	42	2 3/4"	98.6	11	16	1 3/4"	22 ton	5'-6"
1-3/4"	98	80	57	3 1/4"	119	13	19.5	2"	30 ton	6'-6"
2"	127	104	73	4"	169	16	24	2 1/2"	37 ton	8'
2-1/4"	154	126	89	N/A	N/A	N/A	N/A	2 1/2"	-	8'-9"

All master links are sized to accommodate heavy-duty thimbles.  
If thimbles are not required, a smaller master link may be appropriate.

All slings are proof-tested to 2 times working load limit. Design factor is 5:1.