


# 2-Leg Bridle

## HH-202-TTS

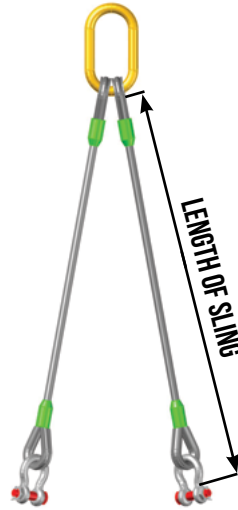

Wire Rope Diameter (inches)	EIPS Capacities In Tons Angle With Horizontal			Crosby A-342 Alloy Oblong Master Link*			Crosby G-2130 Shackle (Inches)	Minimum Sling Length
	60 Deg	45 Deg	30 Deg	Dia.	Width	Length		
1/4"	1.1	0.91	0.65	1/2"	2.5"	5"	3/8"	1'3"
3/8"	2.5	2.0	1.4	5/8"	3"	6"	1/2"	1'8"
1/2"	4.4	3.6	2.5	3/4"	2.75"	5.5"	5/8"	2'0"
5/8"	6.8	5.5	3.9	1"	3.5"	7"	3/4"	2'4"
3/4"	9.7	7.9	5.6	1"	3.5"	7"	7/8"	2'9"
7/8"	13	11	7.6	1-1/4"	4.3"	8.75"	1"	3'3"
1"	17	14	9.8	1-1/2"	5.25"	11.5"	1-1/8"	3'6"
1-1/8"	21	17	12	1-1/2"	5.25"	11.5"	1-1/4"	4'0"
1-1/4"	26	21	15	1-3/4"	6"	12"	1-3/8"	4'6"
1-3/8"	31	25	18	2"	7"	14"	1-1/2"	5'0"
1-1/2"	37	30	21	2"	7"	14"	1-3/4"	5'6"
1-3/4"	49	40	28	2-1/4"	8"	16"	2"	6'6"
2"	63	52	37	2-1/2"	8"	16"	2-1/2"	8'0"
2-1/4"	77	63	44	2-3/4"	9"	16"	2-1/2"	8'9"

All master links are sized to accommodate heavy-duty thimbles.  
 If thimbles are not required, a smaller master link may be appropriate.

All slings are proof-tested to 2 times working load limit. Design factor is 5:1.