


HH-303-TTS

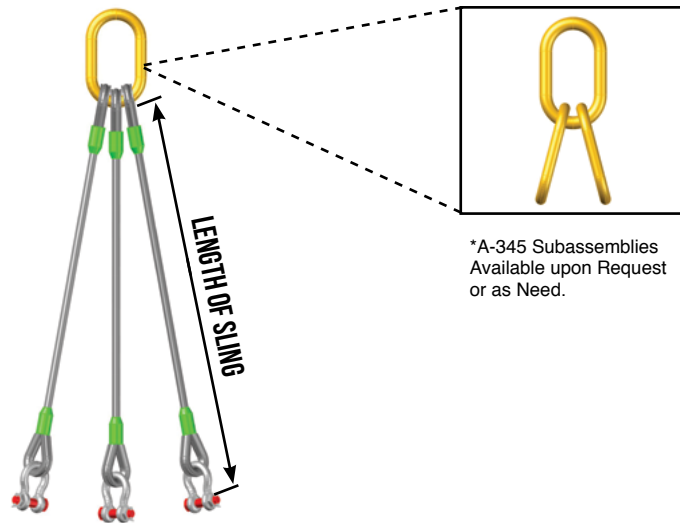

*A-345 Subassemblies Available upon Request or as Need.

Wire Rope Diameter (inches)	EIPS Capacities In Tons Angle With Horizontal			Crosby A-342 Alloy Oblong Master Link*			Crosby G-2130 Shackle (Inches)	Minimum Sling Length
	60 Deg	45 Deg	30 Deg	Dia.	Width	Length		
1/4"	1.7	1.4	0.97	1/2"	2.5"	5"	3/8"	1'3"
3/8"	3.7	3.0	2.2	3/4"	2.75"	5.50"	1/2"	1'8"
1/2"	6.6	5.4	3.8	1"	3.5"	7"	5/8"	2'0"
5/8"	10	8.3	5.9	1"	3.5"	7"	3/4"	2'4"
3/4"	15	12	8.4	1- 1/4"	4.38"	8.75"	7/8"	2'9"
7/8"	20	16	11	1- 1/4"	5.25"	10.5"	1"	3'3"
1"	26	21	15	1-3/4"	6"	12"	1-1/8"	3'6"
1-1/8"	31	25	18	2"	7"	14"	1-1/4"	4'0"
1-1/4"	38	31	22	2-1/4"	8"	16"	1-3/8"	4'6"
1-3/8"	46	38	27	2-1/4"	8"	16"	1-1/2"	5'0"
1-1/2"	55	45	32	2-3/4"	9"	16"	1-3/4"	5'6"
1-3/4"	74	60	42	2-3/4"	9"	16"	2"	6'6"
2"	95	78	55	3-1/4"	10"	20"	2-1/2"	8'0"
2-1/4"	116	94	67	4"	10"	20"	2-1/2"	8'9"

All master links are sized to accommodate heavy-duty thimbles. If thimbles are not required, a smaller master link may be appropriate.

All slings are proof-tested to 2 times working load limit. Design factor is 5:1.