


4-Leg Bridle

HH-404-TTS-342

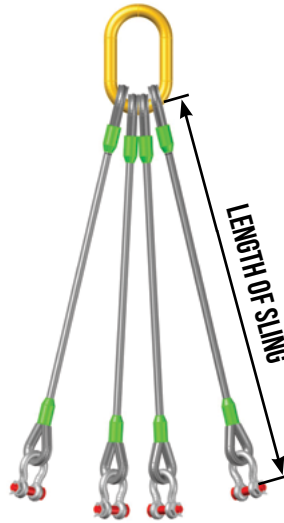

Wire Rope Diameter (inches)	Capacities			A-342 Alloy Master Link			Crosby G-2130 Shackle (Inches)	Minimum Sling Length
	60 Deg	45 Deg	30 Deg	Dia. (inches)	Width (inches)	Length (inches)		
1/4"	2.2	1.8	1.3	1/2"	2	3	3/8"	1'-3"
3/8"	5	4.1	2.9	3/4"	3	4.5	1/2"	1'-8"
1/2"	8.8	7.1	5.1	1"	4	6	5/8"	2'
5/8"	14	11	7.8	1 1/4"	5	7.75	3/4"	2'-4"
3/4"	19	16	11	1 1/2"	6	9	7/8"	2'-9"
7/8"	26	21	15	1 3/4"	7	10.5	1"	3'-3"
1"	34	28	20	1 7/8"	7.5	11.25	1 1/8"	3'-6"
1-1/8"	42	34	24	2 1/4"	9	13.5	1 1/4"	4'
1-1/4"	51	42	30	2 1/2"	10	15	1 3/8"	4'-6"
1-3/8"	62	50	36	2 3/4"	11	16	1 1/2"	5'
1-1/2"	73	60	42	2 3/4"	11	16	1 3/4"	5'-6"
1-3/4"	98	80	57	4"	13	19.5	2 1/2"	6'-6"
2"	127	104	73	4"	16	24	2 1/2"	8'
2-1/4"	154	126	89	N/A	N/A	N/A	2 1/2"	8'-9"

All master links are sized to accommodate heavy-duty thimbles.


If thimbles are not required, a smaller master link may be appropriate.

**If thimble is required at the top, these sizes must use an A-345 Master Link Assembly.

All slings are proof-tested to 2 times working load limit. Design factor is 5:1.

4-Leg Bridle Sub Assembly


HH-404-TTS-345

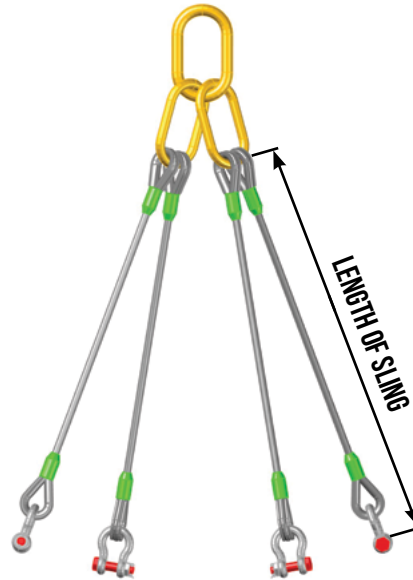

Wire Rope Diameter (inches)	Capacities			A-345 Master Link Assembly				Crosby G-2130 Shackle (inches)	Minimum Sling Length
	60 Deg	45 Deg	30 Deg	Dia. (inches)	Width (inches)	Length (inches)	Inside Dia. (inches)		
1/4"	2.2	1.8	1.3	N/A	N/A	N/A	N/A	3/8"	1'-3"
3/8"	5	4.1	2.9	3/4"	3.2	6	1.77	1/2"	1'-8"
1/2"	8.8	7.1	5.1	1"	4.3	7.5	2.36	5/8"	2'
5/8"	14	11	7.8	1 1/4"	5.5	9.5	3.54	3/4"	2'-4"
3/4"	19	16	11	1 1/2"	5.9	10.5	3.94	7/8"	2'-9"
7/8"	26	21	15	1 3/4"	6	12	5	1"	3'-3"
1"	34	28	20	1 7/8"	6	12	5	1 1/8"	3'-6"
1 1/8"	42	34	24	2 1/4"	7	14	5.75	1 1/4"	4'
1 1/4"	51	42	30	2 1/2"	8.38	16	8.38	1 3/8"	4'-6"
1 3/8"	62	50	36	2 3/4"	8.38	16	8.38	1 1/2"	5'
1 1/2"	73	60	42	2 3/4"	9.88	18	9.88	1 3/4"	5'-6"
1 3/4"	98	80	57	4"	12	24	12	2 1/2"	6'-6"
2"	127	104	73	4"	12	24	12	2 1/2"	8'
2 1/4"	154	126	89	4"	12	24	12	2 1/2"	8'-9"

4-Leg Bridle Pear Link

HH-404-TTS-341

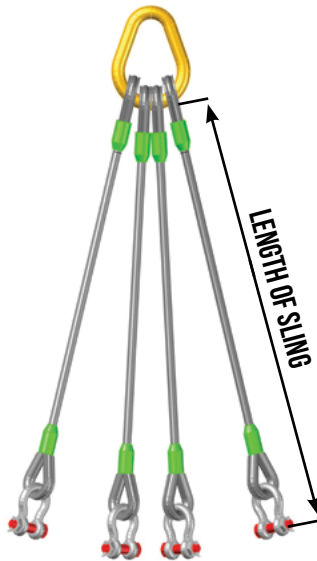

Wire Rope Diameter (inches)	Capacities			A-341 Pear-Shaped Link				Crosby G-2130 Shackle (Tons)	Minimum Sling Length
	60 Deg	45 Deg	30 Deg	Dia. (inches)	Cap. (Tons)	Width (inches)	Length (inches)		
1/4"	2.2	1.8	1.3	1/2"	3.15	2	3	3/8"	1'-3"
3/8"	5	4.1	2.9	3/4"	5.59	3	4.5	1/2"	1'-8"
1/2"	8.8	7.1	5.1	1"	11	4	6	5/8"	2'
5/8"	14	11	7.8	1 1/4"	16.4	5	7.75	3/4"	2'-4"
3/4"	19	16	11	1 1/2"	24.7	6	9	7/8"	2'-9"
7/8"	26	21	15	1 3/4"	38.6	7	10.5	1"	3'-3"
1"	34	28	20	1 7/8"	43.5	7.5	11.25	1 1/8"	3'-6"
1-1/8"	42	34	24	2 1/4"	65	9	13.5	1 1/4"	4'
1-1/4"	51	42	30	2 1/2"	66.9	10	15	1 3/8"	4'-6"
1-3/8"	62	50	36	2 3/4"	98.6	11	16	1 1/2"	5'
1-1/2"	73	60	42	2 3/4"	98.6	11	16	1 3/4"	5'-6"
1-3/4"	98	80	57	3 1/4"	119	13	19.5	2"	6'-6"
2"	127	104	73	4"	169	16	24	2 1/2"	8'
2-1/4"	154	126	89	N/A	N/A	N/A	N/A	2 1/2"	8'-9"

All master links are sized to accommodate heavy-duty thimbles. If thimbles are not required, a smaller master link may be appropriate.

All slings are proof-tested to 2 times working load limit. Design factor is 5:1.