


Precision Spelter Socket Assemblies

HOLLOWAY
HOUSTON, INC.
SETTING THE STANDARD IN LIFTING SOLUTIONS



WIRE ROPE SLINGS

PRODUCTS

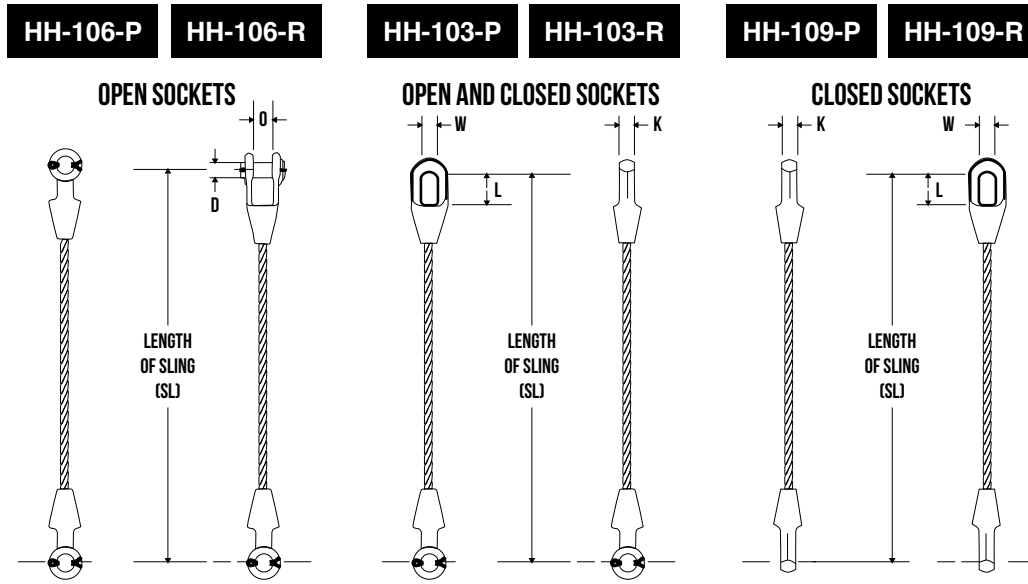

Diameter of Wire Rope (inches)	Minimum Length of Sling	Rated Capacity In Tons of 2,000 Lbs.	Open Sockets			Closed Sockets	
			Dim. O (Inches)	Dim. D (Inches)	Dim. W (Inches)	Dim. L (Inches)	Dim. K (Inches)
1/2"	1'3"	2.66	1"	1"	1.16"	2.25"	0.88"
5/8"	1'6"	4.12	1.25"	1.19"	1.41"	2.5"	1.00"
3/4"	1'9"	5.88	1.5"	1.38"	1.66"	3"	1.25"
7/8"	2'	7.96	1.75"	1.63"	1.88"	3.5"	1.50"
1"	2'6"	10.34	2"	2"	2.3"	4"	1.75"
1-1/8"	2'9"	13.00	2.25"	2.25"	2.56"	4.5"	2.00"
1-1/4"	3'	15.98	2.5"	2.5"	2.81"	5"	2.25"
1-3/8"	3'	19.20	2.5"	2.5"	2.81"	5"	2.25"
1-1/2"	3'3"	22.80	3"	2.75"	3.19"	6"	2.75"
1-3/4"	4'3"	30.60	3.5"	3.5"	3.75"	7.56"	3.13"
2"	4'9"	39.60	4"	3.75"	4.38"	8.56"	3.75"
2-1/4"	5'	49.40	4.5"	4.25"	5"	9.5"	4.00"
2-1/2"	5'9"	60.40	5"	4.75"	5.5"	10.62"	4.50"
2-3/4"	6'3"	72.20	5.25"	5"	6.25"	11.25"	4.88"
3"	6'9"	85.00	5.75"	5.25"	6.75"	11.75"	5.25"
3-1/4"	7'3"	98.40	6.25"	5.5"	7.25"	12.25"	5.75"
3-1/2"	7'6"	112.80	6.75"	6"	7.75"	13"	6.25"
3-3/4"	8'3"	126.40	7.5"	7"	8.5"	14"	7.00"
4"	8'6"	142.60	7.5"	7"	8.5"	14"	7.00"

Socket assemblies are to exact length +/- 1/4".

All assemblies are proof-tested to 40% of catalog breaking strength.

All capacities are based on extra-improved plow steel (EIPS).

Enhanced capacity based on extra-improved plow steel (EIPS). EEIPS is also available upon request.

All slings are proof-tested to 2 times working load limit. Design factor is 5:1.




Visit: www.hhilifting.com for warnings, cautions, use, maintenance, and inspection of Holloway's products.



Precision Swaged Socket Assemblies

HH-500-P HH-500-R HH-503-P HH-503-R HH-502-P HH-502-R

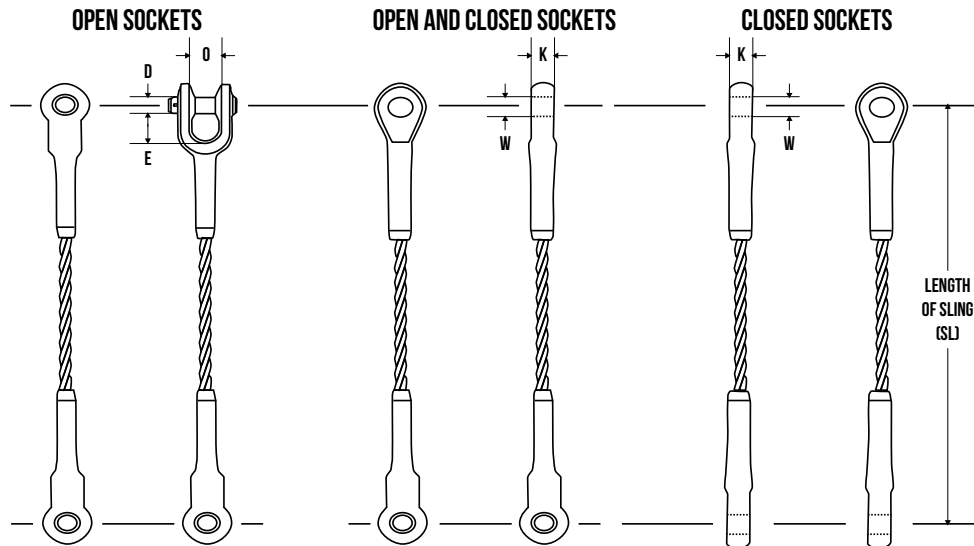

Diameter of Wire Rope (inches)	Minimum Length of Sling	Rated Capacity In Tons of 2,000 Lbs	Open Sockets			Closed Sockets	
			Dim. O (Inches)	Dim. D (Inches)	Dim. E (Inches)	Dim. K (Inches)	Dim. W (Inches)
1/4"	0'11"	0.69	0.69"	0.69"	1.15"	0.5"	0.75"
5/16"	1'3"	1.05	0.81"	0.81"	1.36"	0.67"	0.88"
3/8"	1'3"	1.50	0.81"	0.81"	1.36"	0.67"	0.88"
7/16"	1'8"	2.04	1"	1"	1.5"	0.86"	1.06"
1/2"	1'8"	2.66	1"	1"	1.5"	0.86"	1.06"
9/16"	2'0"	3.36	1.25"	1.19"	1.65"	1.13"	1.25"
5/8"	2'0"	4.12	1.25"	1.19"	1.65"	1.13"	1.25"
3/4"	2'5"	5.88	1.5"	1.38"	2.06"	1.31"	1.44"
7/8"	2'10"	7.96	1.75"	1.62"	2.44"	1.5"	1.69"
1"	3'2"	10.34	2"	2"	2.75"	1.75"	2.06"
1-1/8"	3'7"	13.00	2.25"	2.25"	3.13"	2"	2.31"
1-1/4"	4'0"	15.98	2.5"	2.5"	3.5"	2.25"	2.56"
1-3/8"	4'5"	19.20	2"	2.5"	4"	2.25"	2.56"
1-1/2"	4'9"	22.80	3"	2.75"	4.38"	2.5"	2.81"
1-3/4"	5'5"	30.60	3.5"	3.5"	5"	3"	3.56"
2"	6'4"	39.60	4"	3.75"	6.13"	3.25"	3.81"

Socket assemblies can be ordered pre-stretched and measured under load to exact length +/- 1/4".
 All assemblies are proof-tested to 40% of catalog breaking strength.
 All capacities are based on extra-improved plow steel (EIPS). EEIPS is also available upon request.
 Enhanced capacity based on extra-improved plow steel (EIPS). EEIPS is also available upon request.

All slings are proof-tested to 2 times working load limit. Design factor is 5:1.